
SB tunnel version

Take these harsh conditons with our underground hydraulic breakers.



A solid choice


The SB tunnel version is perfectly adopted for scaling, wall & roof profiling and other tough underground jobs.

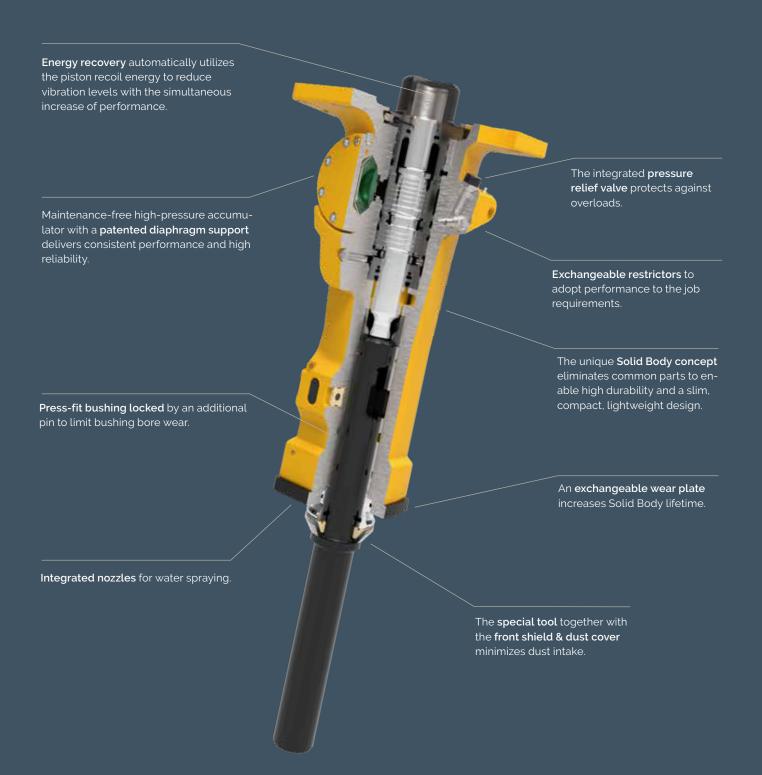

SB range		SB 302 Tunnel	SB 452 Tunnel
Carrier weight class ¹⁾	t	4,5 - 9	6,5 - 13
Service weight ²⁾	kg	315	450
Tool diameter	mm	80	95
For Scaling			
Restrictor diameter	mm	6,7	8,7
Maximum hydraulic input	kW	15	18
Oil flow rate	l/min	50-80	70-100
Operating pressure	bar	100-110	100-110
Impact rate	bpm	950-1.250	850-1.150
Sound power level guaranteed ³⁾	dB(A)	118	122
Α	mm	852	894
В	mm	400	470
For Tunneling			
Restrictor diameter	mm	6,4	7,5
Maximum hydraulic input	kW	20	25
Oil flow rate	l/min	50-80	55-100
Operating pressure	bar	100-150	100-150
Impact rate	bpm	600-1.400	550-1.250
Sound power level guaranteed ³⁾	dB(A)	118	122
A	mm	852	894
В	mm	400	470



¹⁰ Weights apply to standard carriers only. Any variances must be agreed with Epiroc and/or the carrier manufacturer prior to attachment.
²⁰ Attachment with standard working tool & average-sized adapter plate.
³⁰ EN ISO 3744 in accordance with directive 2000/14/EC

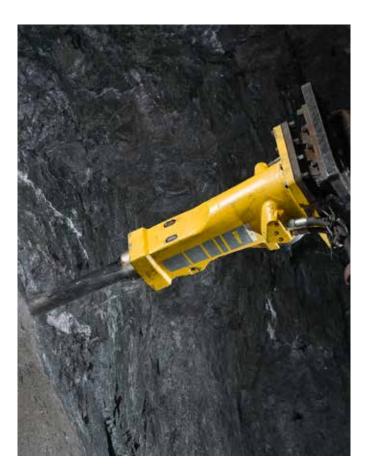



United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow. **epiroc.com**

